
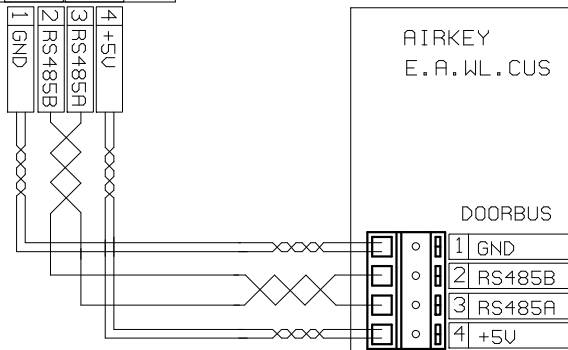



AIRKEY  
WALLREADER  
E.A.WL.Rx




\* POWER SUPPLY 2 IS NECESSARY IF THE USED ELECTRIC STRIKE HAS  
A DIFFERENT OPERATION VOLTAGE THAN THE MAIN SUPPLY OR THE  
OVERALL POWER CONSUMPTION IS HIGHER THAN 1000mA.

AIRKEY READER  
CONNECTORBOARD



CAT5 CABLE  
MAX 20m  
UP TO 100m  
IF R-LOOP MAX < 2 OHM


INPUT 1



PROTECTION  
DIODE  
BZW50-27B  
BIPOLAR!


PLEASE MOUNT THIS  
PROTECTION DIODE IF  
THE LENGTH OF THE  
LOW VOLTAGE POWERCORD  
EXCEEDS 3 METER.

SUPPLY  
VOLTAGERANGE  
12V-24V DC



EVVA POWER SUPPLY  
E.ZU.WL.NT  
12V DC / 2.0A

230V AC



AC ELECTRIC STRIKE  
(CONTINUOUS LOAD  
TYPE RECOMMENDED)