



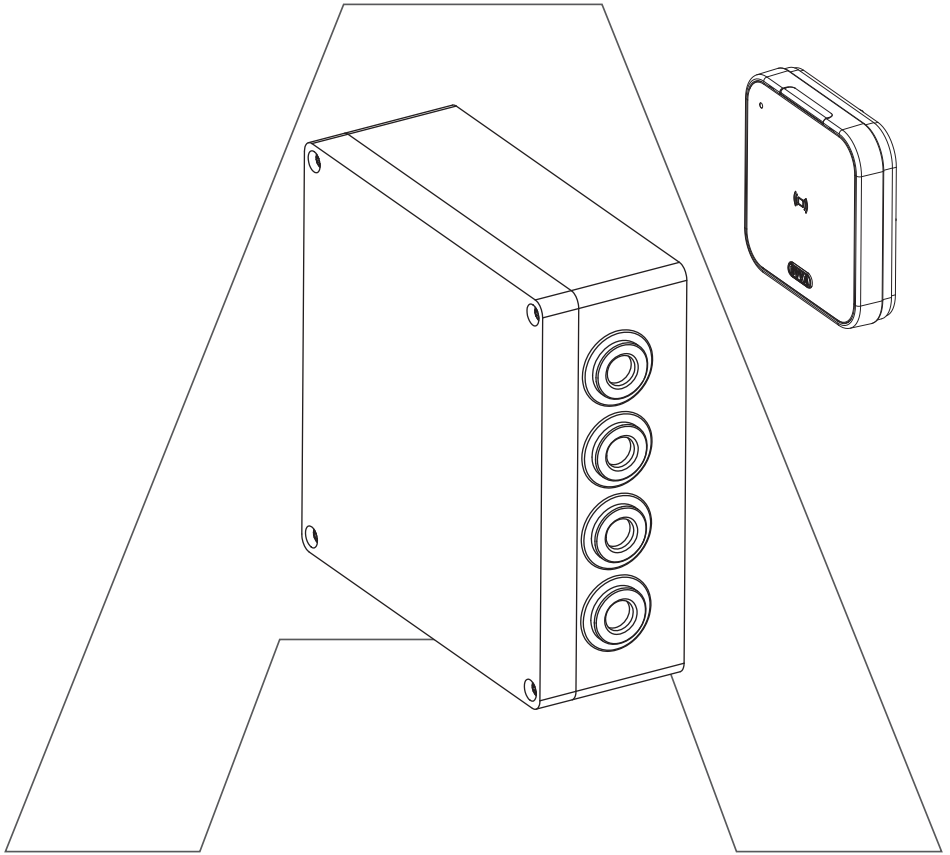


AirKey

E.A.WL.CU.V1

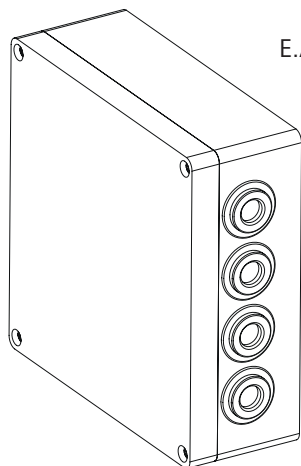

E.A.WL.CU.V1


IP54




E.TE.ZU.CU6





Option




E.ZU.WL.NT.V1




E.A.WL._ _





PH1



2,5/0,5 mm





4x





Option




CAT 5 max. 20 m
up to 100 m –
Rloop max. $<2\Omega$

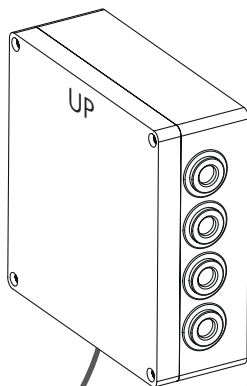



Option




1

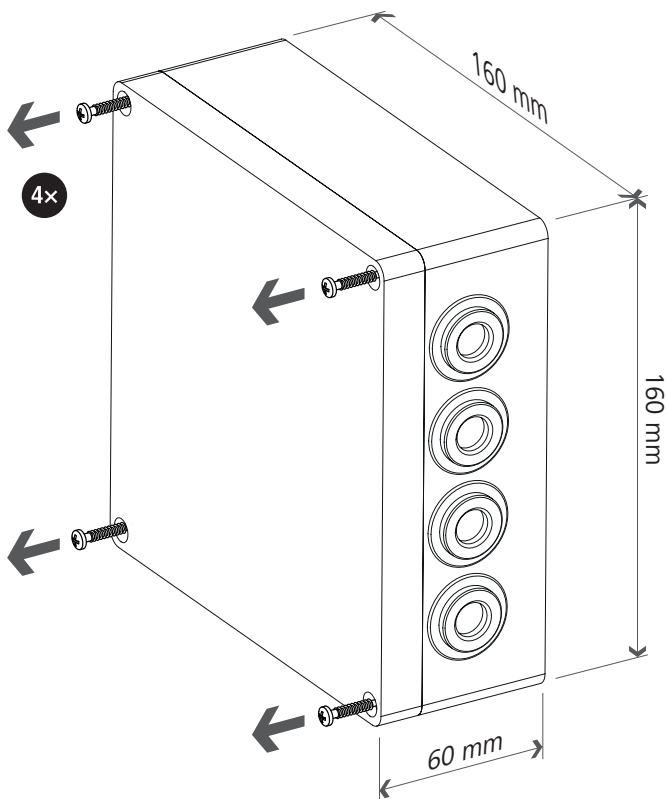





2

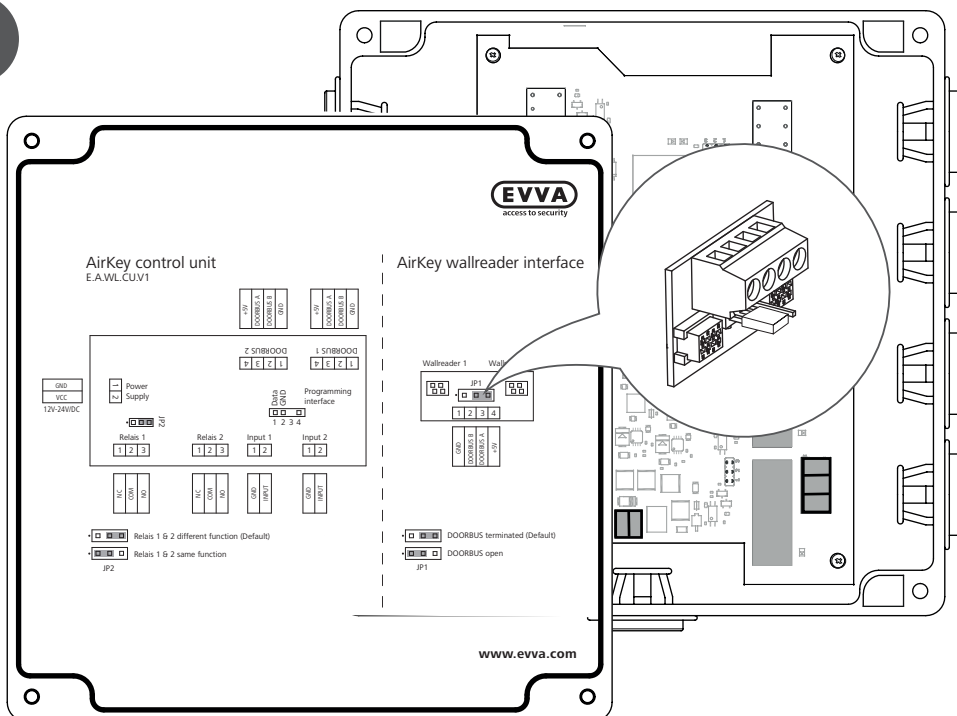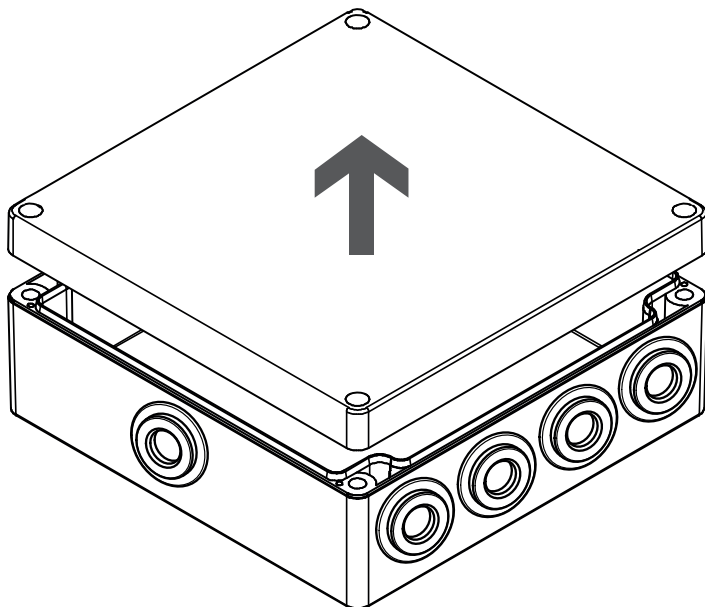



3

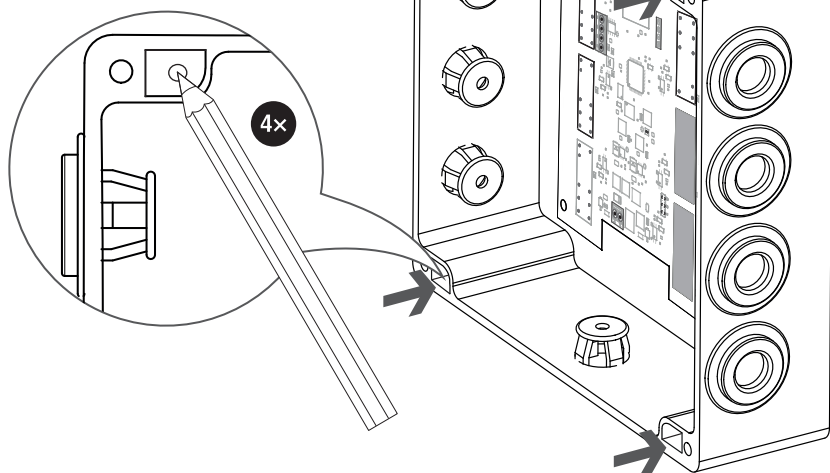



4

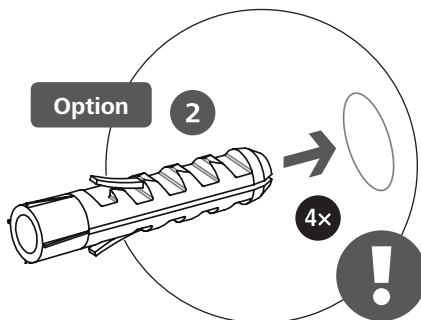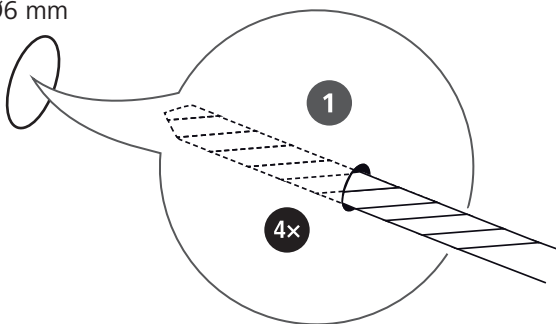




5

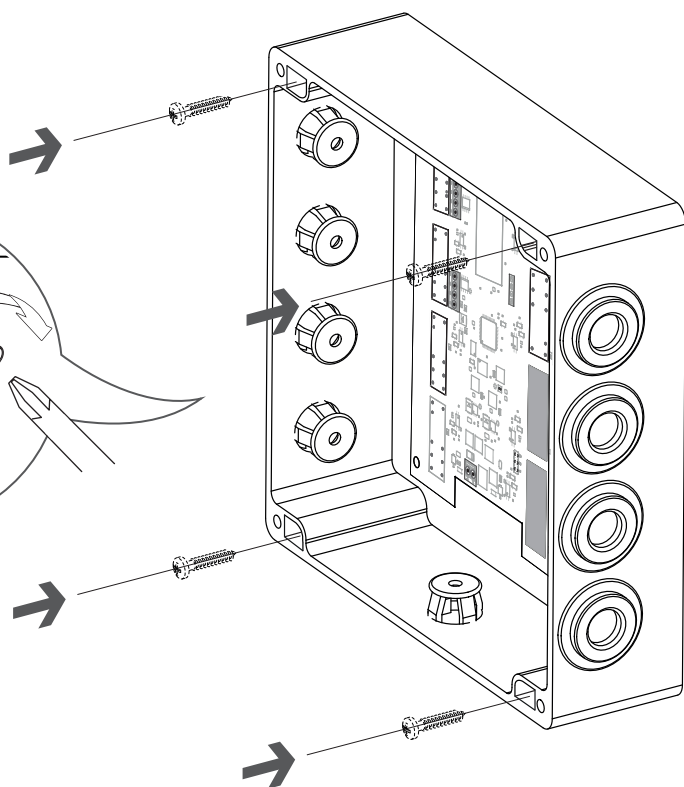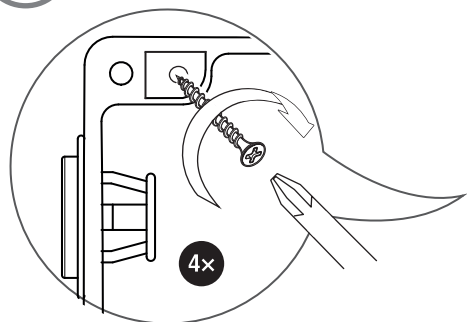

6

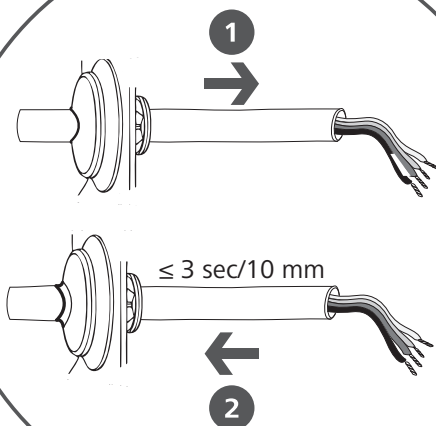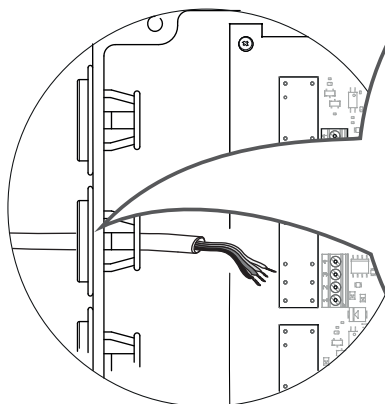

7

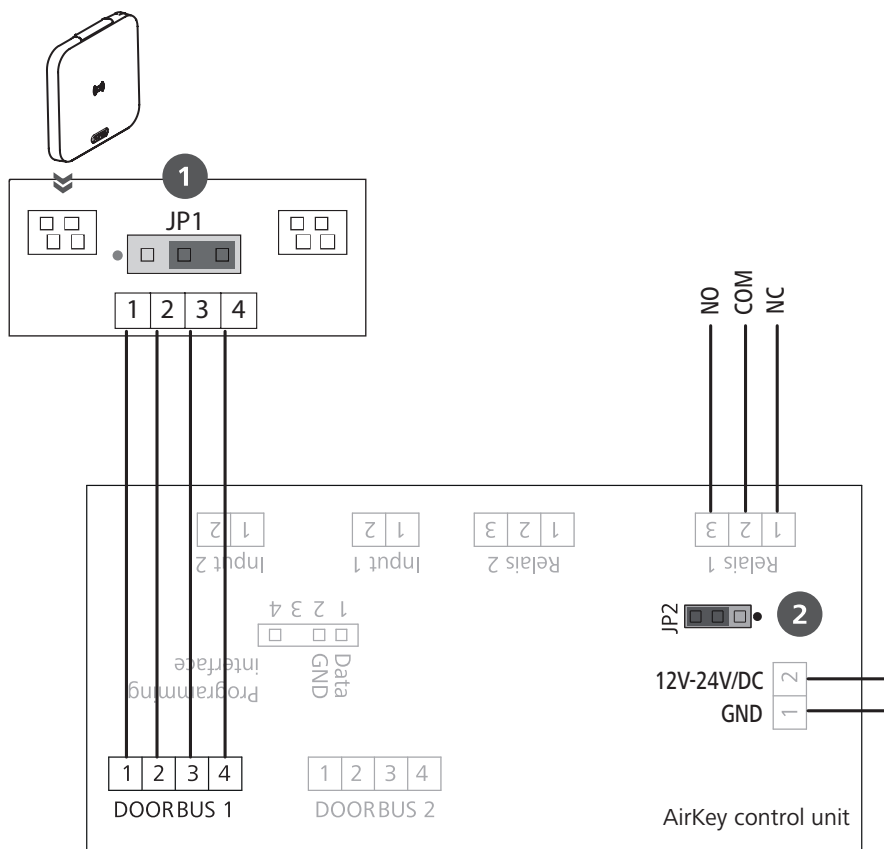

8

CAT 5

1



0,2 Nm

2

CHECK

EVVA
access to securityAirKey control unit
EA-WL-CUV1

AirKey wallreader interface



www.evva.com

Option







E.ZU.WL.NTV1 12V-24V/DC

GND	VCC
1	2




0,5 Nm






Option $\geq 3\text{m}$

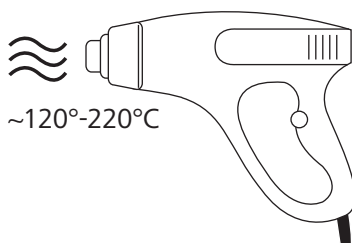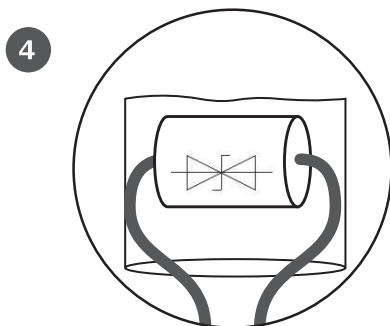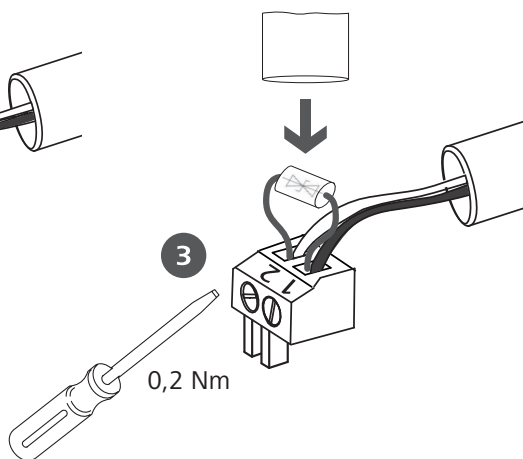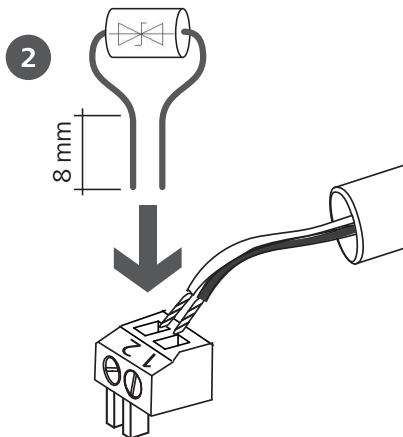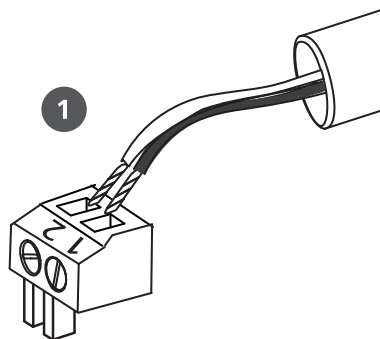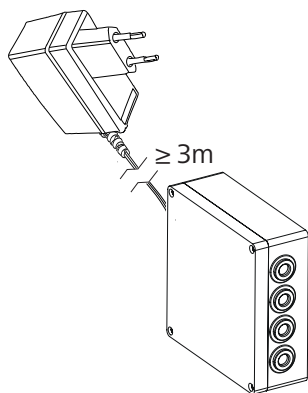


9

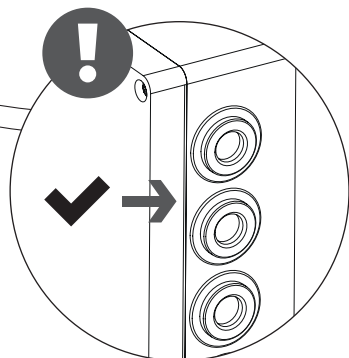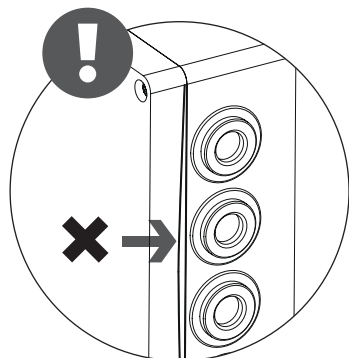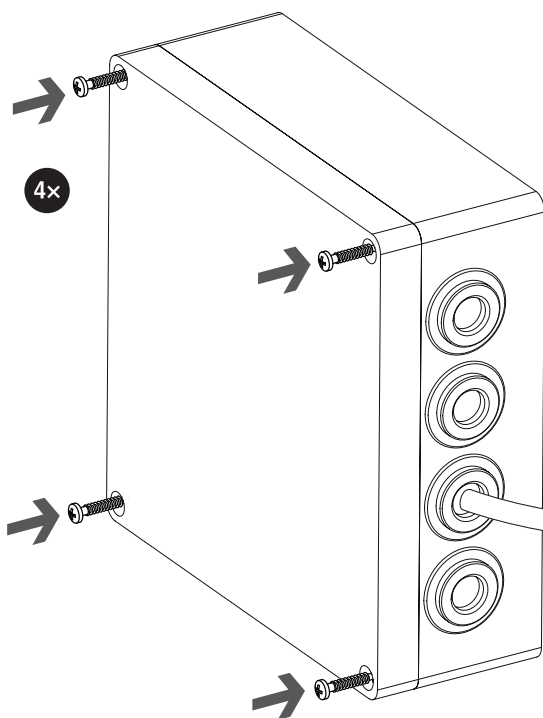


10

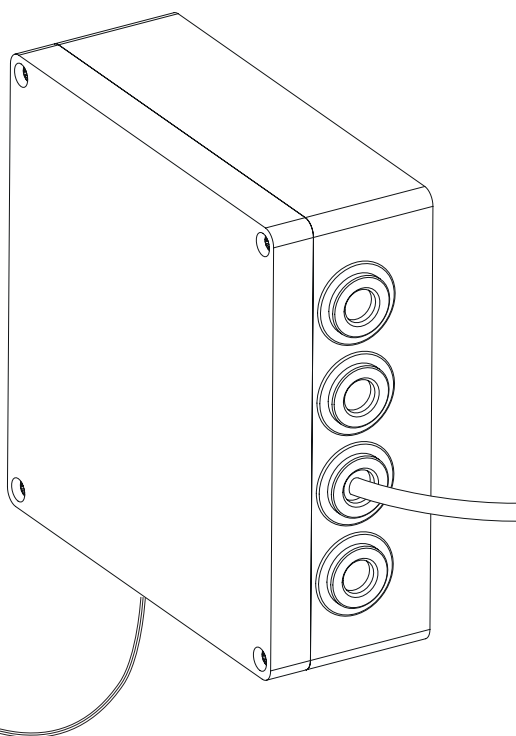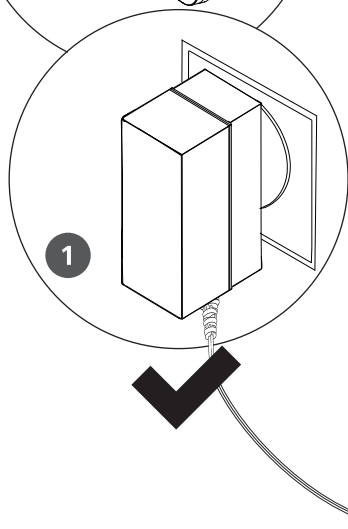


01 CONTROL UNIT WITH DC LOW CURRENT ELECTRIC STROKES

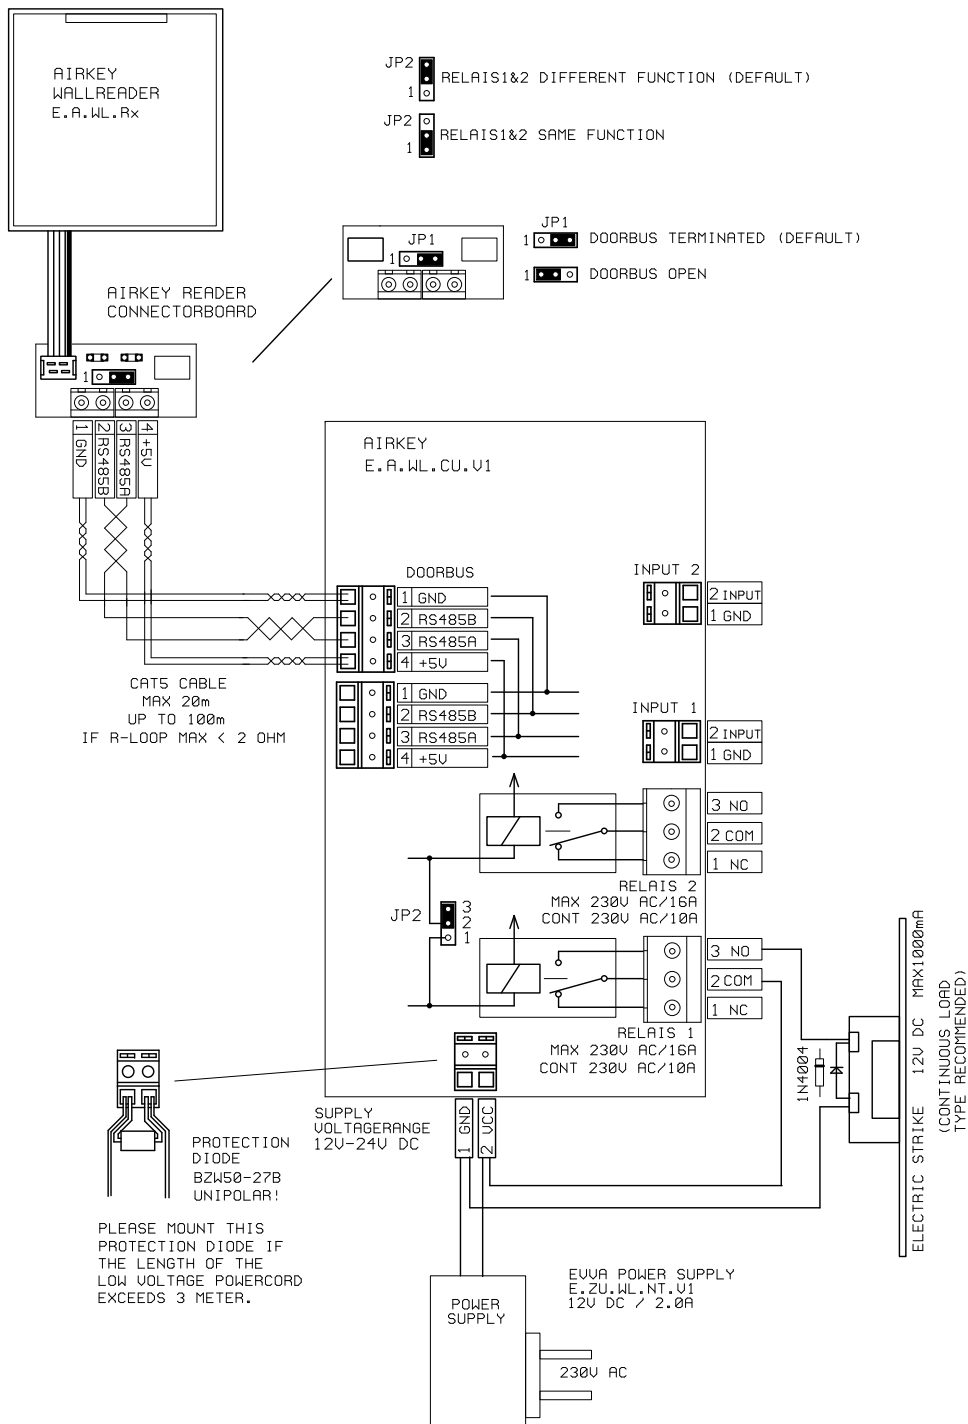


02 CONTROL UNIT WITH DC HIGH CURRENT ELECTRIC STROKES

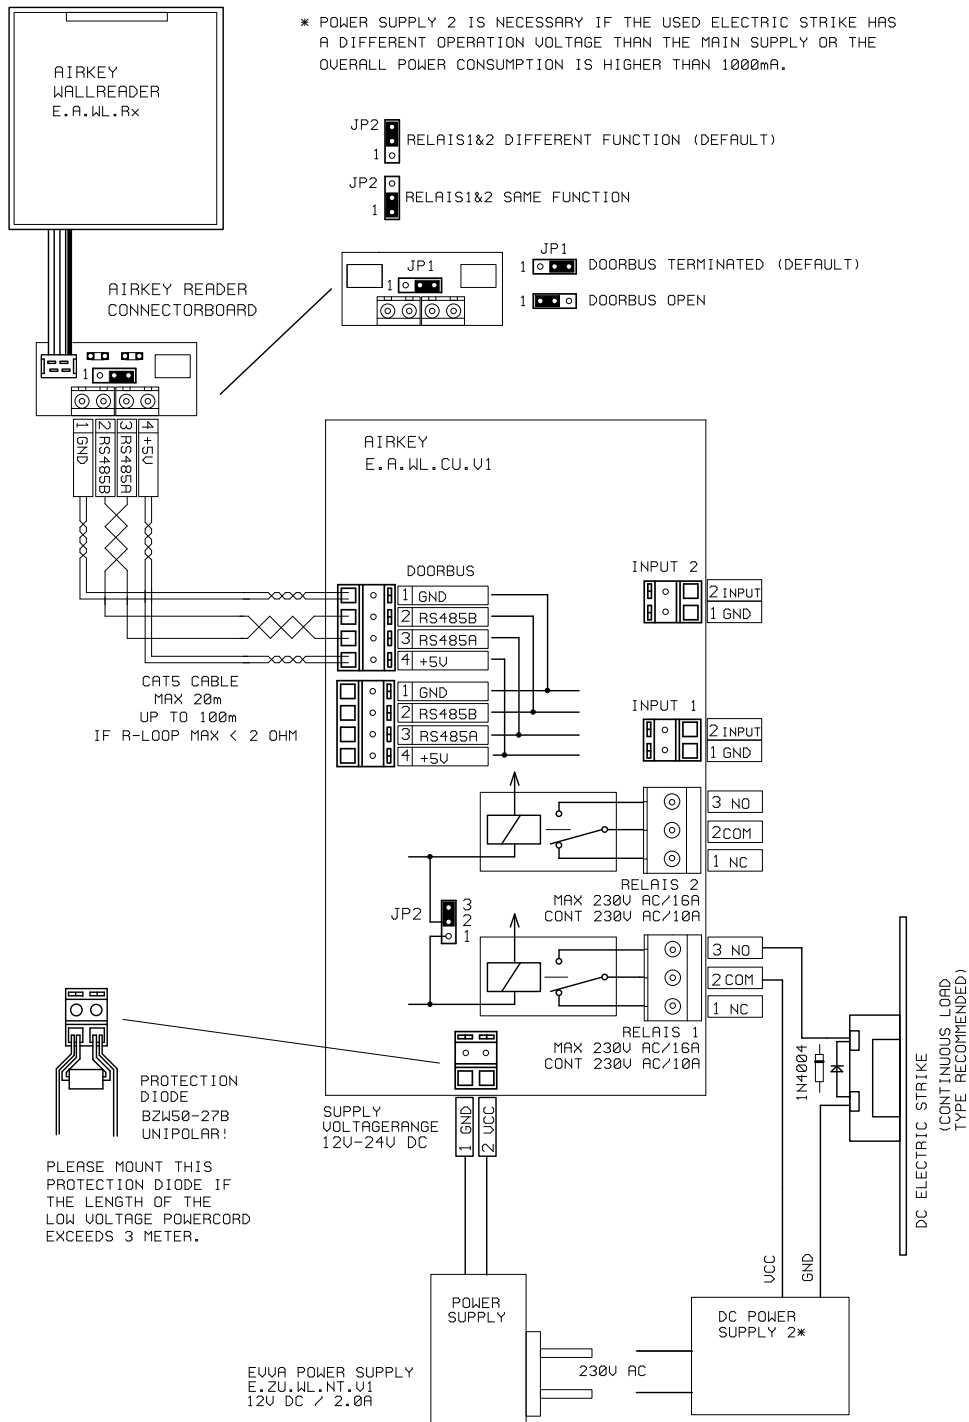

03 CONTROL UNIT WITH AC ELECTRIC STROKES

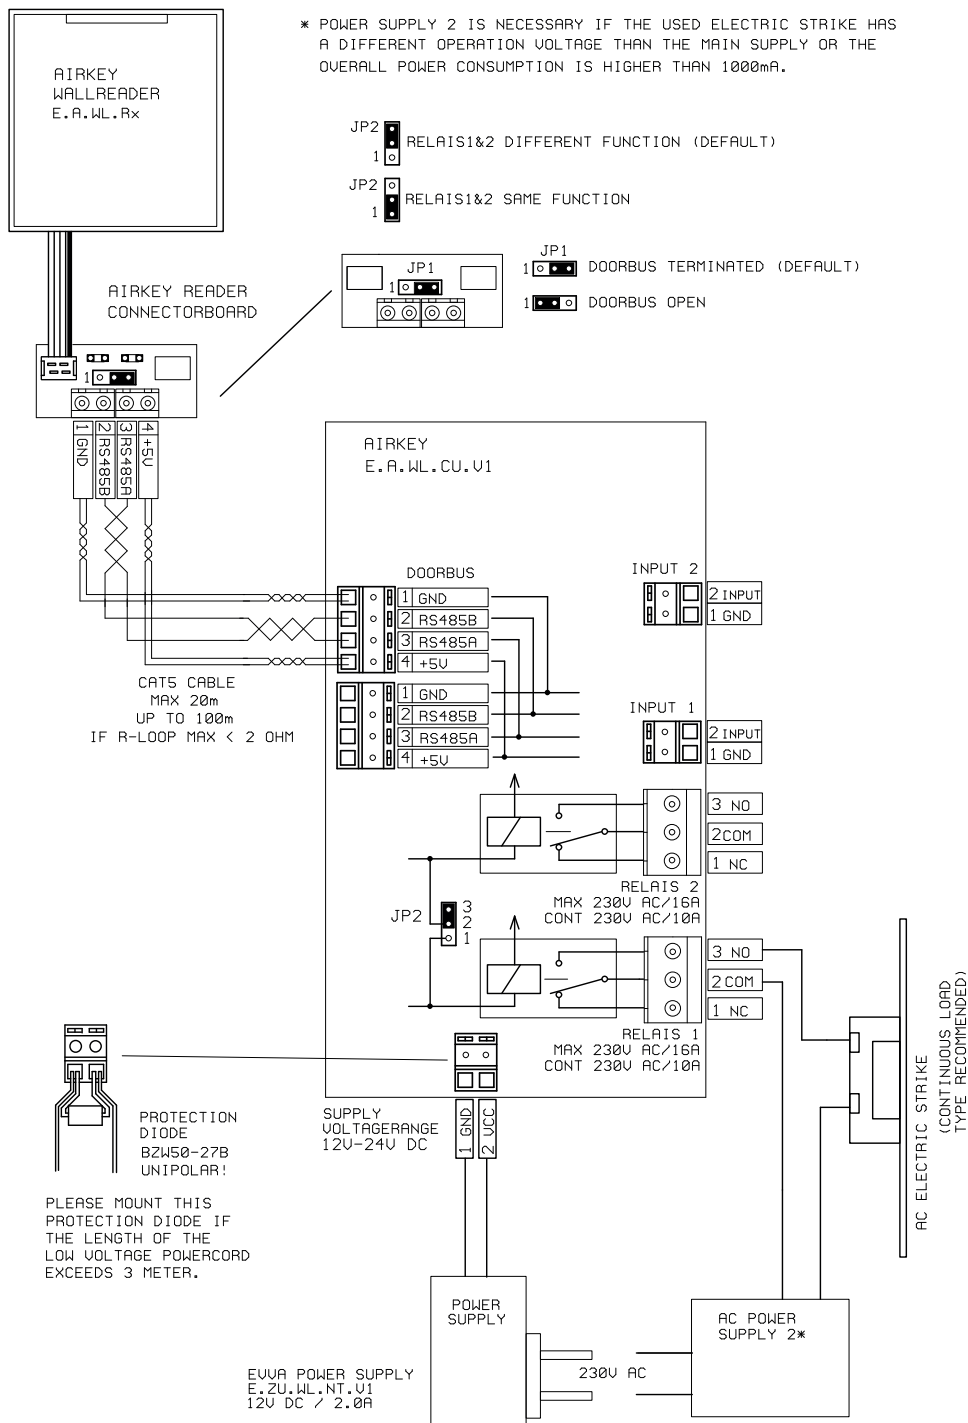

04 CONTROL UNIT WITH EXTERNAL DOOR CONTROL UNIT

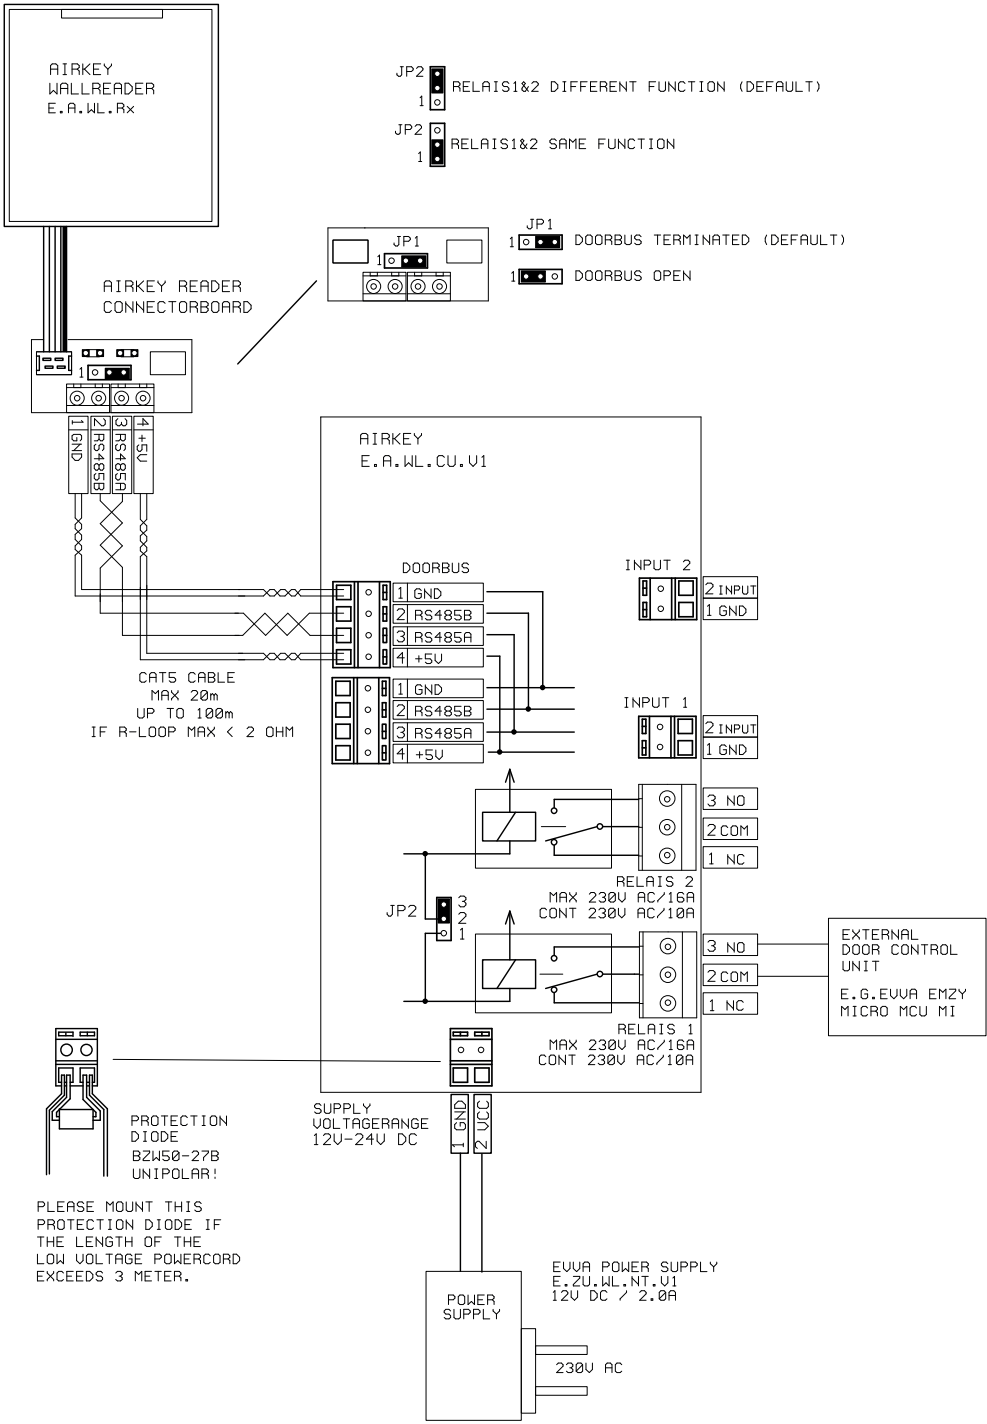

CE

