



ICS Switch cylinder | MB19SZ

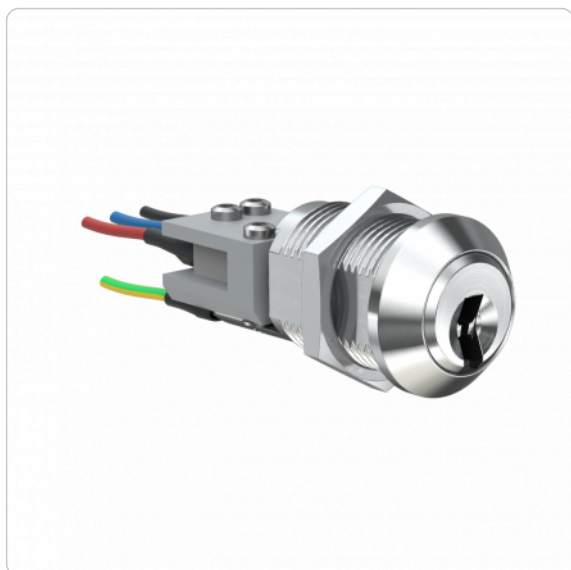

Product description

The ICS switch cylinder MB19SZ is suitable for direct integration into circuits. It is equipped with a microswitch on the rear, fits a hole pattern larger than 19 mm and is flattened on the side (to prevent rotation). It is fastened on the inside by a flat nut. Application examples are control panels and machine switches.

Technical information

Cylinder length on the outside A in mm	39
Finish	NI – Nickel MS – Brass NP – Polished Nickel MP – Polished brass ML – Brass lacquered CR – Chrome CP – Polished chrome PS – Patinated black PB – Patinated brown
Optional usage feature	B01 – 2 key extracting positions 0°, 90°
Accessories	Spray FinLube
Security features	Locking authorisation request on up to 5 tracks with spring-loaded locking elements Durable length profile Specially shaped locking pins as scanning protection and picking protection Hardened HSS steel pins in the cylinder plug as drilling protection
Standards and guidelines	CE
Technical installation situation	Possible switching capacities: 50 VAC: 5 A 0-15 VDC: 5 A 15-30 VDC: 3 A 250 VAC, 5 A
Included components	Switch cylinder with integrated microswitch
Product code	M.ICS.SZ.MB19SZ.39.[Finish].[Option]
Example	ICS Switch cylinder, 19 mm diameter, nickel finish, with 2 key extracting positions: M.ICS.SZ.MB19SZ.39.NI.B01

¹In preparation.

Dimensional drawing

